

G101 FuzzoaR

Description

- 70's Silicon Fuzz with long sustain
- Sound ranges from mildly distorted to crunch


Installation

The G101 FuzzoaR is designed to be used in the G100 Modular Effect System.

1. Unplug the Base Unit power cord
2. Locate an empty slot
3. Plug the 4-pin socket into an available connector on the BusBoard
4. Place the module in the base unit and secure with two M3x8mm bolts

Controls

1. Mounting holes
2. External switch jack socket
3. Input jack socket
4. Output jack socket
5. LED, red when effect turned-on
6. Bypass mode switch
7. Volume knob controls overall volume of the effect
8. Fuzz knob controls the level of Fuzz

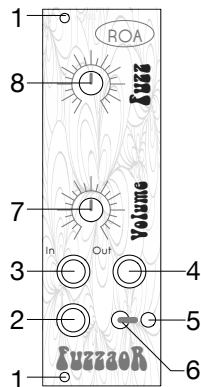


Turning the Effect On/Off


The effect has a relay based true-bypass. The effect can be turned-on by toggling the Bypass-mode switch to the right. In this mode the effect is always on. Toggle the switch to the left to use an external control, like a foot control, to remotely turn-on and turn-off the effect. The external switch control must be of the 'make' type. In either case the red led lights up when the effect is enabled.

Usage


Run a cable from the guitar to the In jack socket.
Run a cable from the Out jack socket to the amplifier.
Start with all controls at 12 o'clock
Turn-on the effect
Rotate the Volume knob clockwise to increase the output level and counterclockwise to decrease it
Rotate the Fuzz knob clockwise to increase the level of Fuzz and counterclockwise to decrease it.

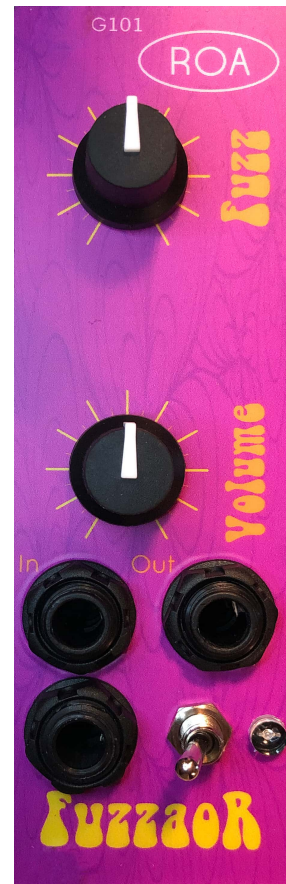


Examples






Gurgling
Brown

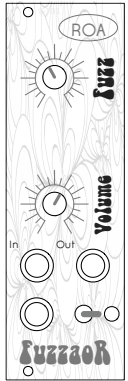


Metallic
Satisfaction



Screaming
Gargoyle

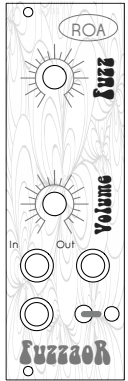

Feel The Sound

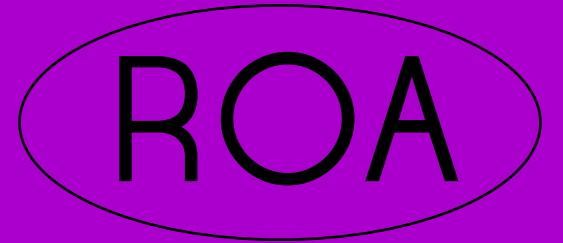

ROA Music Corporation

G101 FuzzoR